


CAR SEAT STROLLER

INSTRUCTION MANUAL

MODEL:S366

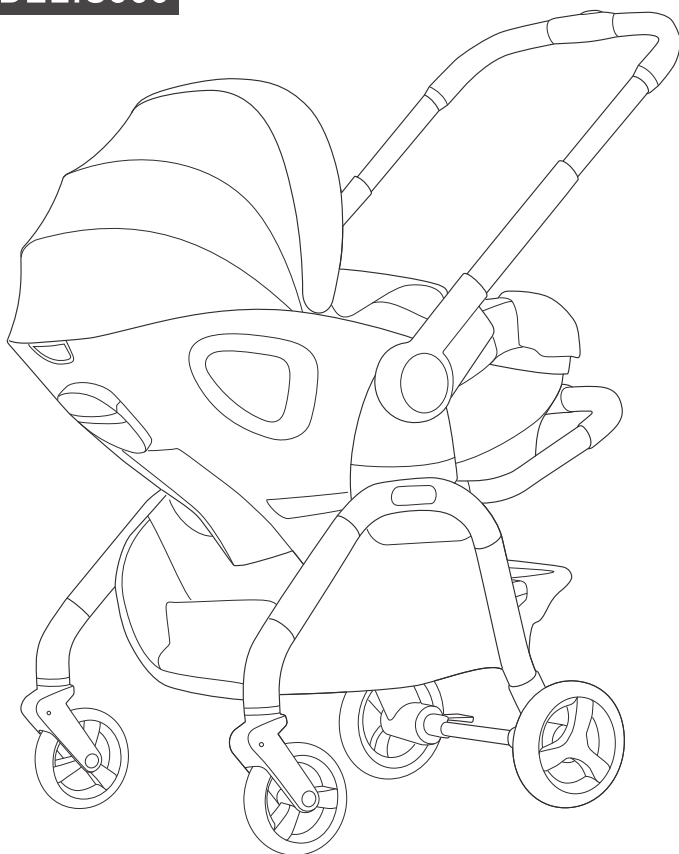

R129/03

EN1888-1:2018 + A1:2022

Before use, users and guardians should carefully read this manual and keep it for future reference. Failure to follow this manual may affect children's safety.

WARNING :


- ◆ **WARNING!** NEVER LEAVE THE CHILD UNATTENDED.
- ◆ **WARNING!** USE A HARNESS AS SOON AS THE CHILD CAN SIT UNAIDED.
- ◆ **WARNING!** ALWAYS USE THE RESTRAINT SYSTEM.
- ◆ **WARNING!** THIS PRODUCT IS NOT SUITABLE FOR RUNNING OR SKATING.
- ◆ **WARNING!** THIS STROLLER IS DESIGNED FOR BABY UP TO 13 KG
- ◆ **WARNING!** KEEP AWAY FROM FIRE.
- ◆ **WARNING!** READ THE MANUAL CAREFULLY AND KEEP FOR FUTURE
- ◆ **WARNING!** ENSURE THAT ALL THE LOCKING DEVICES ARE ENGAGED BEFORE USE
- ◆ **WARNING!** YOU MUST REMOVE ALL THINGS FROM THE BASKET BEFORE FOLDING THE STROLLER.
- ◆ **WARNING!** TO AVOID INJURY ENSURE THAT THE CHILD IS KEPT AWAY WHEN UNFOLDING AND FOLDING THIS PRODUCT.
WHEN FOLDING OR UNFOLDING THE STROLLER ENSURE THAT YOUR CHILD IS EITHER RESTRAINED WITH THE HARNESS (ARMS AND LEGS ARE KEPT AWAY FROM MOVING PARTS). OR KEPT AWAY WHEN NOT SEATED
- ◆ **WARNING!** DO NOT LET THE CHILD PLAY WITH THIS PRODUCT
- ◆ **WARNING!** THE BASKET SAFE WORKING LOAD IS 2KG.

IMPORTANT—


READ CAREFULLY AND KEEP FOR FUTURE REFERENCE.

- BUCKLE RING MAY CAUSE ASPHYXIA. SO UNTIE THE SAFETY BELT WHEN YOU NEED TO STOP USING THIS PRODUCT.
- IF ANY PARTS ARE DAMAGED OR MISSING, SHOULD IMMEDIATELY STOP USING THIS STROLLER.
- FORBIDDEN TO USE THE STROLLER AS THE TOY
- THIS PRODUCT IS NOT INTENDED FOR PROLONGED PERIODS OF SLEEPING.
- DO NOT TWIST THE BELT.
- THE CAR SEAT MUST NOT BE USED WITHOUT THE FABRIC COVER AND CUSHION.
- TO PREVENT THE DAMAGE FOR INFANTS, PLEASE PUT ATTENTION ON THEM WHEN YOU ADJUST THIS STROLLER.
- PLEASE PARK THIS AFTER THE BRAKE IS ON. AND DON'T BRAKE THE STROLLER WHEN IT IS WALKING ON THE WAY.
- FORBIDDEN THE CHILD PLAY OR STAND ON THE PEDAL.
- IF THE PACKAGE, OR ATTACHMENTS, OR BOTH ARE PLACED IN THE BABY STROLLER , IT MAY CAUSE THE CART TO BECOME UNSTABLE
- THE LOAD OF THE BASKET IS 2 KG. IF PUT THINGS HEAVIER THAN THAT, IT MAY EFFECT THE STEADINESS OF THE STROLLER.
- IT ONLY CAN BEAR ONE CHILD IN ONE TIME. SO NEVER LET TWO CHILD OR MORE USE THE STROLLER AT THE SAME TIME.
- SHOULD ATTEND THE SITUATION ON THE ROAD WHEN PUSH THE STROLLER ON THE ROAD.
- SHOULD HOLD YOUR CHILD IN YOUR ARMS AND ATTEND THE SAFETY ALL THE TIME WHEN YO U TAKE THE STAIRS OR ELEVATOR.
- DO NOT USE THE PARTS PROVIDED BY NON-MANUFACTURER.
- A STATEMENT THAT ANY LOAD ATTACHED TO THE HANDLE AND/OR ON THE BACK OF THE BACKREST AND/OR ON THE SIDES OF THE VEHICLE WILL AFFECT THE STABILITY OF THE VEHICLE.
- ONLY REPLACEMENT PARTS SUPPLIED OR RECOMMENDED BY THE MANUFACTURER/DISTRIBUTOR SHALL BE USED.
- AVOID SERIOUS INJURY FROM FALLING OR SLIDING OUT, ALWAYS USE SEAT BELT .
- IF YOU ADD A LOAD CARRYING ACCESSORY TO YOUR BABY STROLLER , THERE MAY BE AN UNSTABLE, DANGEROUS SITUATION.
- CARRYING HANDLES SHALL BE LEFT OUT OF THE PRAM BODY DURING USE.
- ACCESSORIES WHICH ARE NOT APPROVED BY THE MANUFACTURER SHALL NOT BE USED.


PRODUCTS CHARACTER

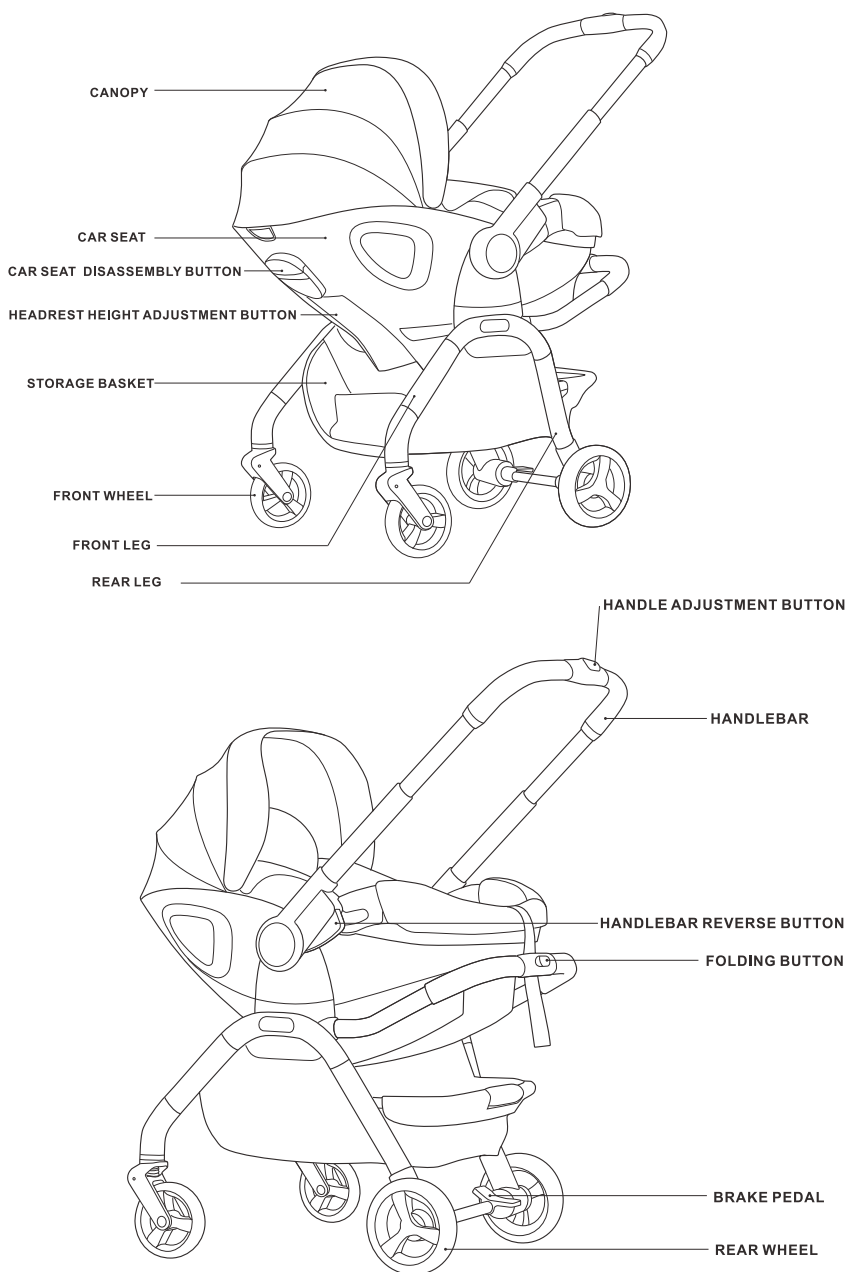


1 STROLLER UNFOLDING PROCESS

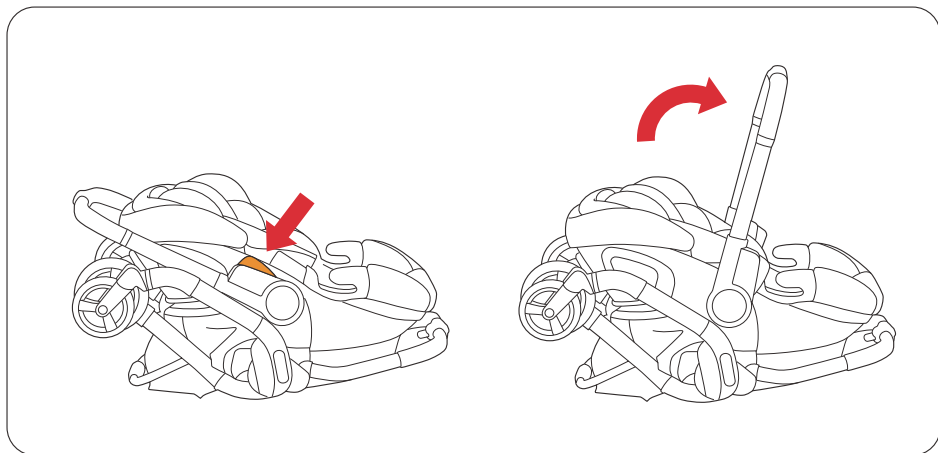


1. Press both sides handle reverse button and turn to vertical of ground

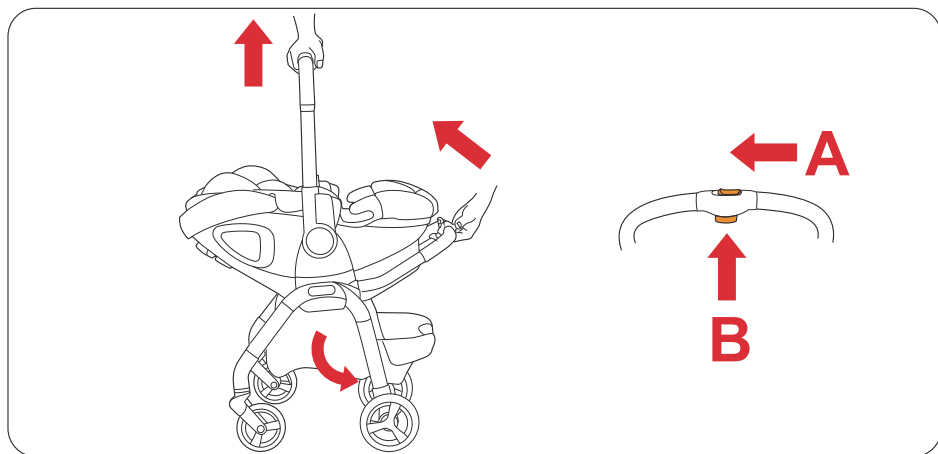

2. Push the unlock button as arrow A and press the folding button as arrow B, in the same time, lift up the stroller, unfold both front legs and rear legs as arrow.

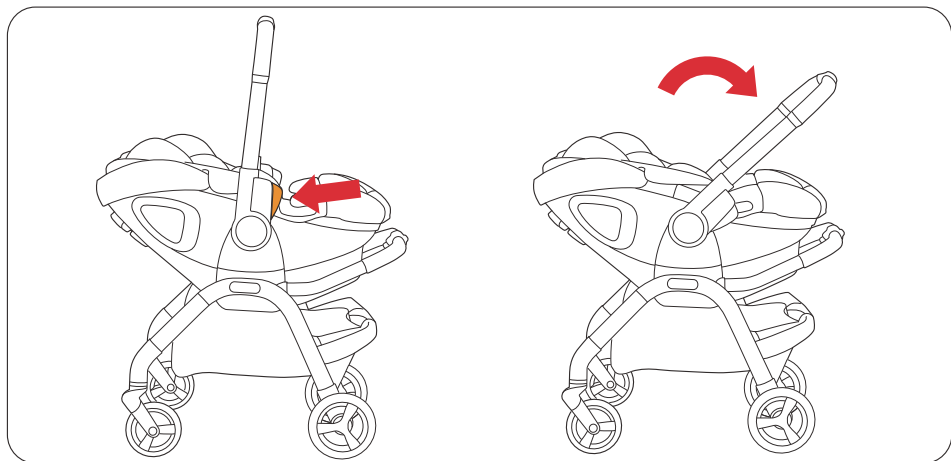


3. Press both sides handle reverse button and turn to desired position

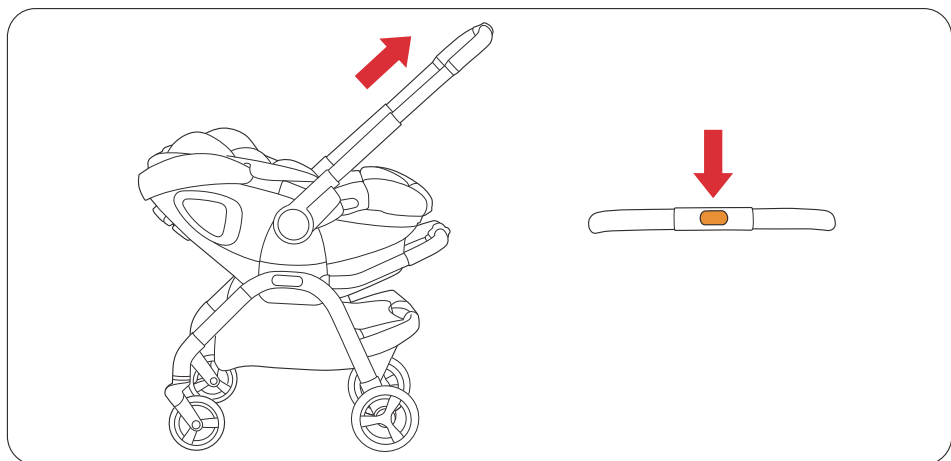


4. Press the handle adjustment button to adjust the handle height


2 STROLLER FOLDING PROCESS

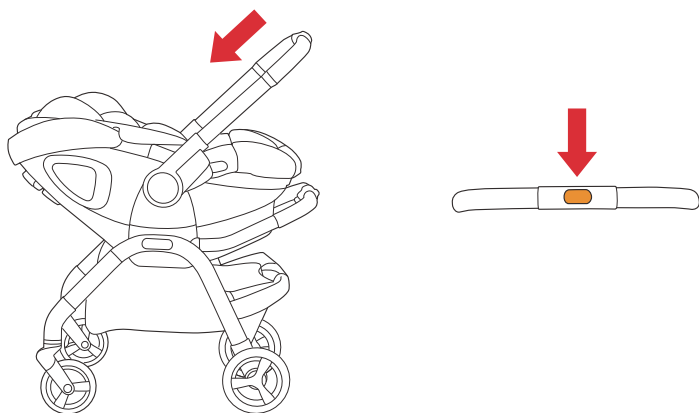


1. Press the handle adjustment button to fold the handle at lowest position.

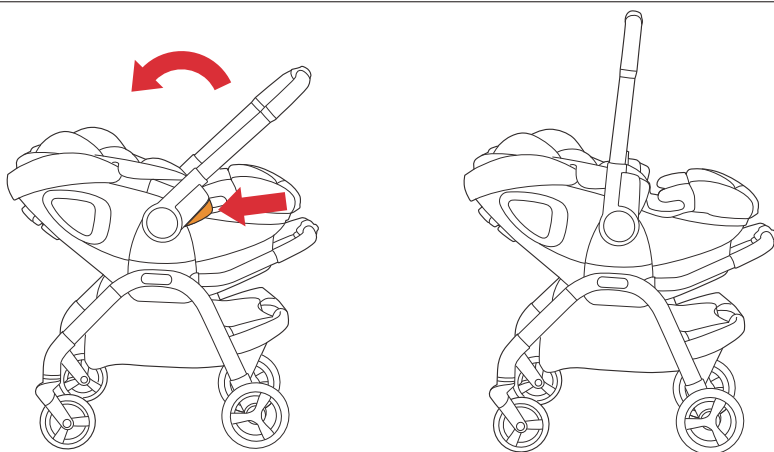

2. Press both sides handle reverse button and turn to vertical of ground

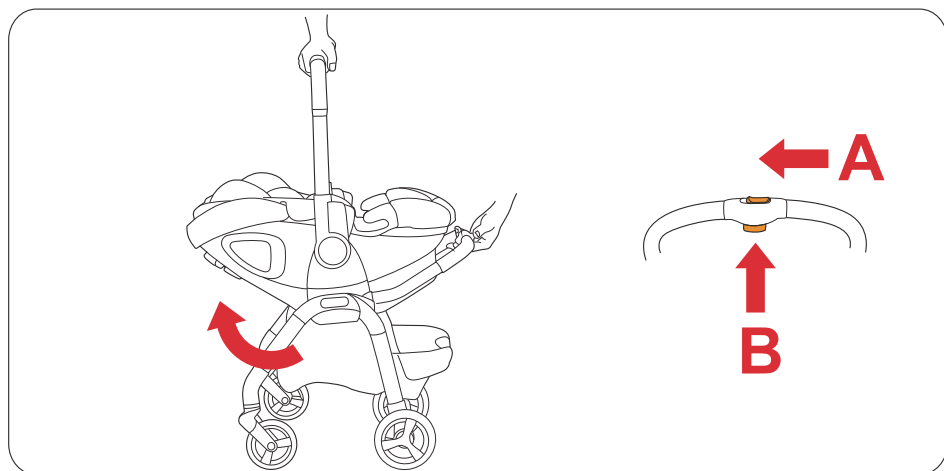


3. Push the unlock button as arrow A and press the folding button as arrow B, in the same time, lift up the stroller, fold both front legs and rear legs as arrow

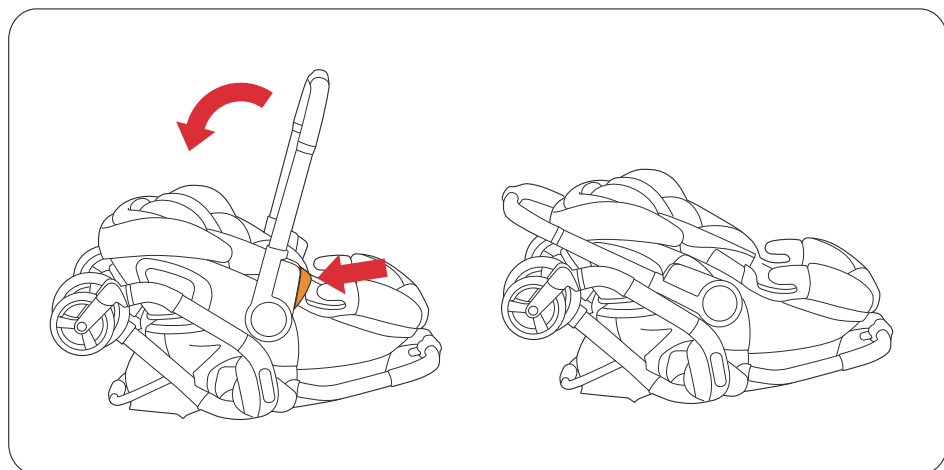


4. Press both sides handle reverse button and turn to desired position

3 STROLLER BRAKE

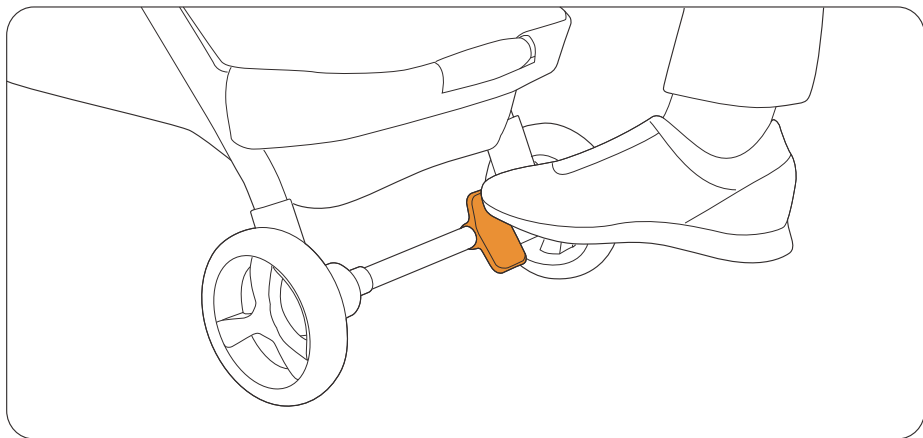


1.Step on the top of brake pedal,and stroller un-braking

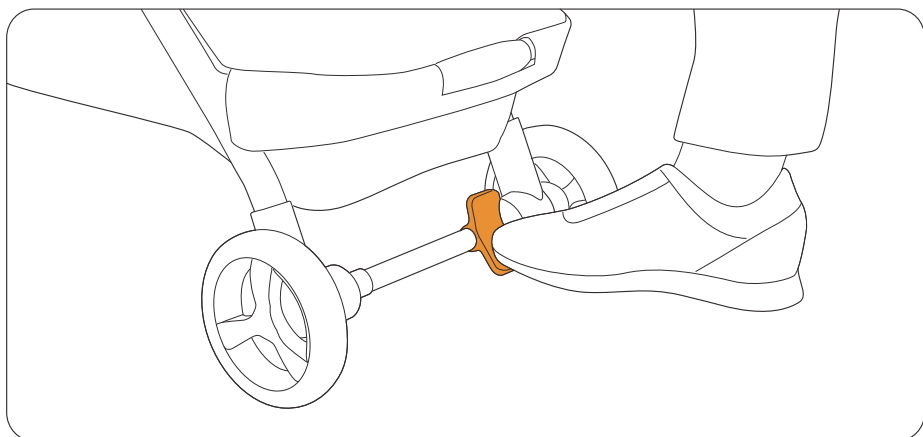


2.Step on the bottom of brake pedal,and stroller braking

4 DISASSEMBLY CAR SEAT

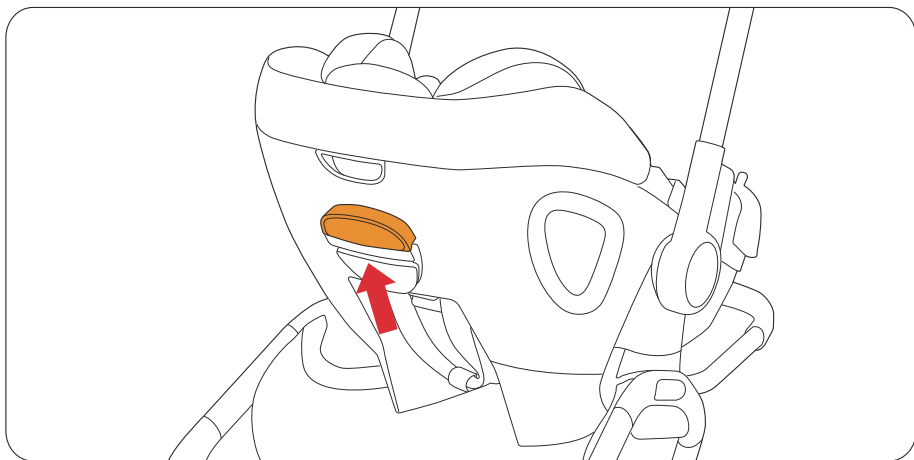

1. When the handlebar stay at the lowest position and vertical of ground, and the same time press the carseat disassembly button and lift up the carseat.

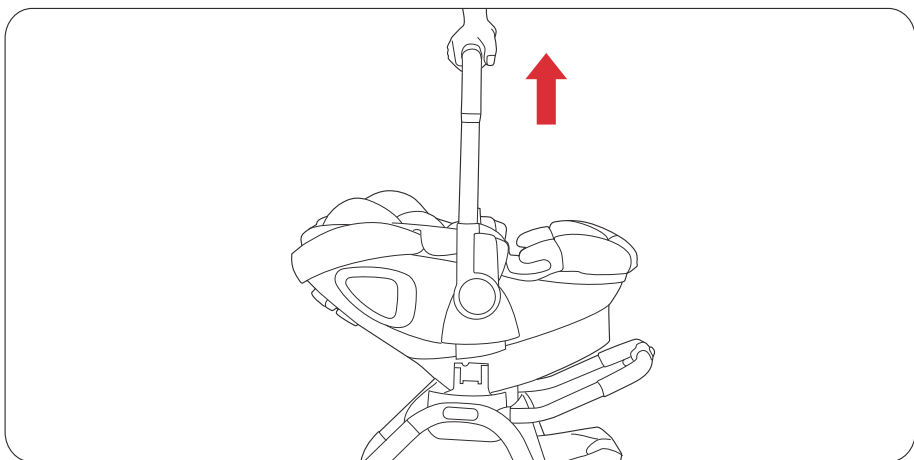

NOTES

The following brief instructions are intended to provide only an over view. In order to achieve maximum security and comfort for your child it is absolutely imperative that you read the whole instruction manual carefully. Order of tasks: set up infant car seat-strap the child in-install infant car seat in the vehicle.

1.Applicability

Stature Height: 40-87cm


Weight Limit: $\leq 13\text{kg}$



AIR BAG

DO NOT put the baby car seat on seats on which a frontairbag is activated.

- Only suitable for vehicle seats with a three point automatic belt approved under ECE regulation no R.16 or equivalent standard.

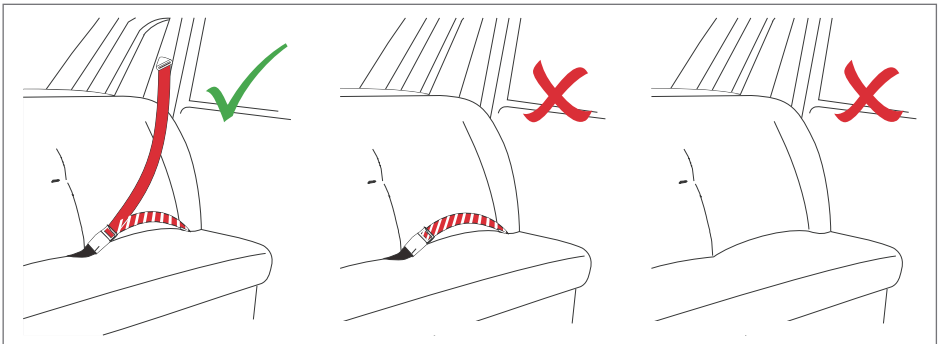

2. Safety instructions

WARNING! If the infant car seat is placed on the vehicle seat in a way that is not stable or at too steep an angle, it can be adjusted with an additional blanket.

WARNING! Do not use the infant car seat on a seat on which a front airbag is activated. This does not apply to so-called side airbags.

WARNING! The large-volume front airbag expands explosively and may cause your child serious injury or even death.

WARNING! The infant car seat only offers the best possible protection when exactly following the instructions given in this manual.

WARNING! No modifications or additions may be made to the Car seat without the approval of manufacturer. Repairs may only be undertaken by persons who have been authorized to do so. In doing so, they must always use original components and accessory parts only. If not, the infant car seat's protective function is no longer guaranteed.

WARNING! NEVER hold a baby on your lap in a car. The forces released in a collision are way too high for any person to hold on to the baby. Never secure yourself and the child with only one seatbelt.

The rigid items and plastic parts of an ECRS must be so located and installed that they are not liable, during everyday use of the vehicle, to become trapped by a movable seat or in a door of the vehicle.

The device should be replaced when it has been subject to violent stresses in an accident.

The chair should be kept away from sunlight, otherwise it may be too hot for the child's skin.

Any luggage or other objects liable to cause injuries in the event of a collision shall be properly secured.

WARNING! Please never leave your child unattended in a vehicle.

WARNING! Please ensure that any straps holding the restraint to the vehicle is tight and the straps restraining the child are adjusted to the child's body. Any straps should not be twisted.

WARNING! Any luggage or other objects liable to cause injuries in the event of a collision must be properly secured.

WARNING! NEVER leave your child alone or unattended in the child restraint system.

WARNING! Always keep this manual together with the infant carrier for future reference.


WARNING! Do not use the infant car seat on a seat with an activated front seat airbag. This does not apply to so-called side airbags.

- all unsecured objects in the vehicle are secured.
- all persons in the vehicle are strapped in.

WARNING! The vehicle belt buckle must under no circumstances reach into the lower lap belt guide. If the belt stalk is too long, the infant car seat is not suitable for use in this position in the vehicle. In case of doubt, please contact the manufacturer of your vehicle.

WARNING! The infant car seat must always be secured with the vehicle seatbelt, even when not being used. In the event of an emergency stop or a minor collision, an unsecured infant car seat can injure other passengers and yourself.

3. Parts and interior equipment.

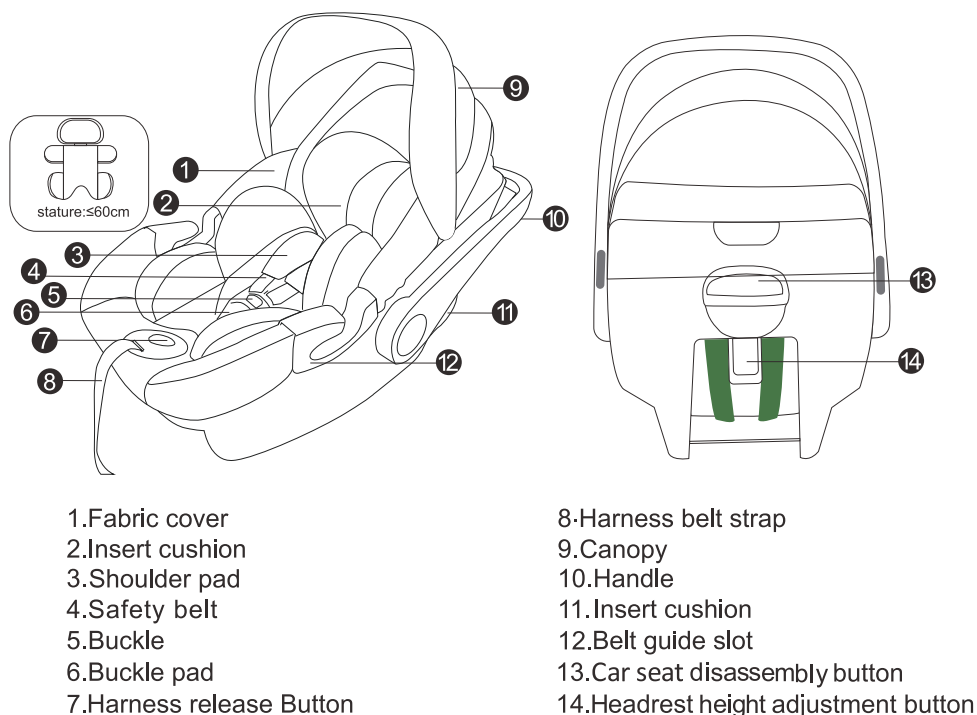

4.General use

4.1.Adjusting the handle bar

- You can lock the handle bar into 4 positions.
- To adjust the handle bar, please press the handle bar reverse button on both sides.
- Then rotate the handle bar until it automatically locks in the place in the desired position.

WARNING! Always strap your child in with the integrated belt system.



Fig.1




Fig.2




Fig.3




Fig.4

Fig. 1: Vehicle and carrying position, Place the infant car seat facing the rear of the vehicle on the vehicle seat (the child's feet point towards to the backrest of the vehicle seat).

Fig .2: Straight up for carrying.

Fig.3: Handle clicked back to initiate the rocking feature.

Fig.4: Handel clicked down for upright sitting position, for putting baby inside.

- **Always strap your child in with the integrated belt system and make sure the handle is locked in right position.**

5.Installation in car

- Please read the instruction manuals in order to protect all passengers.
- Do not put this infant car seat on a seat with activated front airbag.
- The infant car seat can be suitable for vehicle seats with a three point automatic belt.
- The infant baby car seat must be installed rearward facing(the child's feet point towards to the backrest of the vehicle seat).




Fig.1

Step 1. Ensure the handle bar in the forward position.

Put the infant car seat in vehicle's seat (Fig.1), put the infant car seat against the backrest of the vehicle seat.




Fig.2

Step 2. Slide the lap belt of the vehicle's 3-point seat belt through both lap belt guides. Let the tongue plate snap in the belt lock with a clearly audible "click". Pull the shoulder belt in narrow direction to tighten the lap belt. Check to make sure the tongue plate is locked by pulling on the belt (Fig.2).




Fig.3

Step3. Place the diagonal belt in the diagonal belt guide at the back of the seat . rotate the handle of the seat to the appropriate place in the car. (Hearing "click") Be sure the handle has been locked and it should be firmly against the backrest of vehicle's seat (Fig.3).




Fig.4

Step 4. Tighten the vehicle's own 3-point seat belt by pulling hard on the positions showed in fig.4.

- Attention: The handle of the seat must be firmly installed against the backrest of car seat.
- You can release the child if you act the above steps in reversal ways.
- Make sure all the belts' position is right and not been twisted. Also check that the cover is not impeding the movement or fit of the belt webbing in any way.
- The satisfactory position of the adult safety-belt buckle relative to the child car seat is incorrect as the Fig 5. Fig.6 You can contact the manufacturer if in doubt about this point.



Fig.5





Fig.6

6. Correct securing your baby

6.1. Setting the shoulder belt height.

Check whether the shoulder belts be at the right height for your child. The belts should be at shoulder height or just above.




Height adjustment of the headrest and shoulder strap:
Pull up the headrest adjusting handle, the headrest and the shoulder strap move up synchronously.

Press down the headrest adjusting handle and move the headrest down synchronously with the shoulder strap.

Caution! Please loosen the seat safety belt before adjusting the height of the headrest. Loosen the shoulder harness (see point 6.2)



6.2. Adjust the shoulder straps



- The shoulder straps are slackened by pressing the lever (under the seat cover) on the front of the seat.
- Press down the seat belt adjustment button as you grip the two shoulder straps with your other hand. Pull the shoulder straps towards you to loosen it.

6.3. Securing the baby with the harness

1. Firstly, adjust the shoulder straps height (see point 6.1), proceed as follows.
2. Loosen the harness (see point 6.2), open the buckle, and place them down sideways. Put your child in the child car seat. Place both shoulder straps over your child's shoulders.
3. Lock the buckle tightly.
4. Ensure that the straps are close to the shoulder of the child by pulling the straps tightly.



- The harness should be adjusted as tightly as possible without causing discomfort to your child.
- It is dangerous not to tighten the straps. Check the adjuster and be sure that the straps are pulled tightly, not twisted after installation everytime.

6.4.The use of buckle

- 1.Put the two metal sections of the buckle connectors together (fig.1).
- 2.Slot the two buckle connectors into the slot in the top of the buckle until hearing “click”(fig.2).
- 3.Check the harness is correctly locked by pulling the shoulder straps upwards (fig.3).
- 4.To release the harness, press the red button on the buckle downwards.




Fig.1




Fig.2





Fig.3


7.Clean and Maintenance

7.1.How to remove Canopy for clean

Step 1: Release the 5 canopy lock pins and 2 snap buttons at both sides.

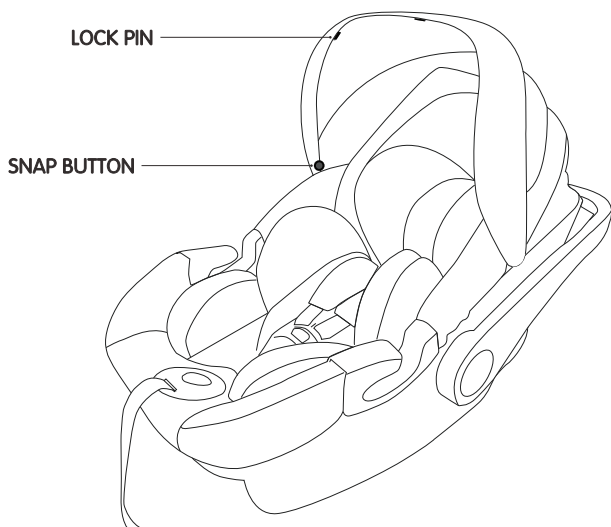


Step 2: Remove the whole fabric from the edge and use hand clean.

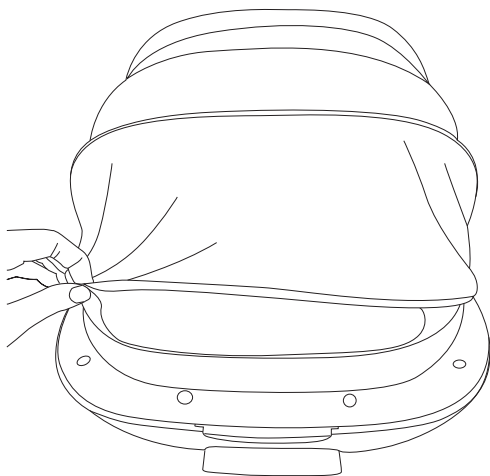

7.2.How to remove the Seat Cover to clean

Step 1: Release the Harness Buckle

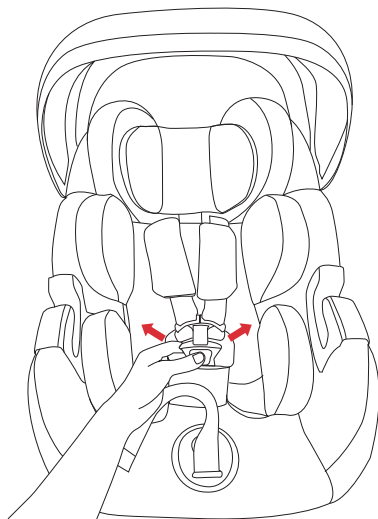

Step 2: Remove the seat cover from around and use hand clean.



- Follow the steps described above but in reverse order in order to re-fasten the cover.

7.3.Cleaning

WARNING! Never use harsh cleaning or bleaching agents!

WARNING! The belt system cannot be dismantled!

Never remove individual parts of the belt system!

You can clean the belts with a clean cloth and some lukewarm soapy water. Try to avoid getting the belts too wet.

Use only neutral detergent and warm water to wash the fabric cover. **Do not wash it by machine; Do not bleach; Do not tumble-dry and spin-dry; Hang dry; Do not wring; Do not iron; Do not dry clean.**

THIS COVER SHOULD BE HAND WASH



7.4.Care and Maintenance

- 1.Please regularly check the function and spare parts of the baby car seat stroller are in good condition to provide the maximum protection.
- 2.Before using, please check the locking fastness of the buckle by pulling in effort the straps and see whether the buckle is loose or not.
- 3.Do not use the baby car seat stroller in cold,wet or hot circumstance for long time.

