

USER'S MANUAL

NAME: BABY STROLLER

MODEL: V7



Please read this manual carefully before use and keep it for future reference. Failure to follow the instructions may endanger your child's safety.

PARTS LIST



2

INSTALLATION STEPS

3 Rear Brake Bracket Installation

Installation: Insert the brake into the rear frame.
Disassembly: Press the release buttons on both sides and pull them out outward.



4

4 Rear wheel installation and removal

Installation: Insert the rear wheel axle into the circular hole of the rear wheel seat.
Disassembly: Pull up the quick release button and pull out the rear wheel.



INSTALLATION STEPS

7 Installation and removal of car seat adapter

Installation: Insert the adapter into the lower side of the armrest.
Disassembly: Press the button and pull it out outward.




6

INSTRUCTIONS FOR USE

3 Use of wind hood

Put in the windproof cover, press the adhesive button, and hang the corner buckle on the elastic rope.

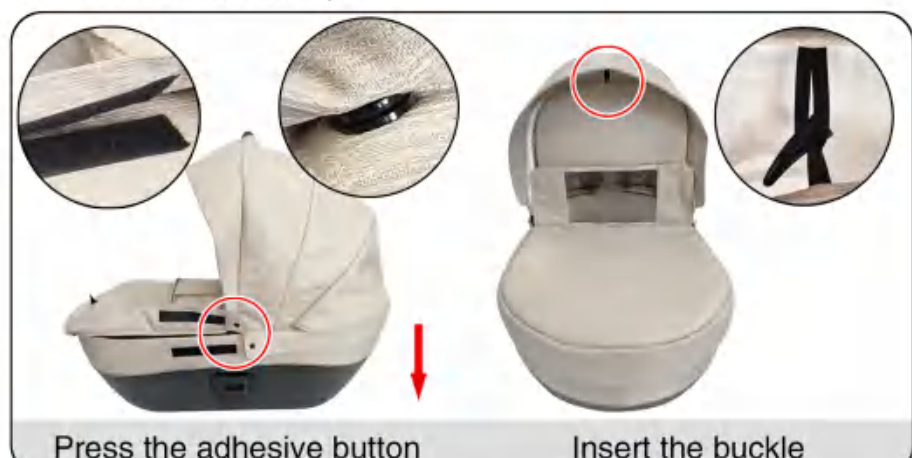

4 Push handle and foot pedal adjustment

Press the buttons on both sides to adjust the angle of the push handle.
Press the buttons on both sides to adjust the pedal angle.



8

INSTRUCTIONS FOR USE

7 Folding cart

Press the handle until the frame is fully engaged, then hook onto the locking hook.



WARNING!

- Keep away from fire.
- Never leave your child unattended.
- Always use the brakes as long as the baby stroller is still.
- Please use safety belt in all situations.
- Any load attached to the handle bar may affect the stability of the stroller.
- Only replacement parts supplied or recommended by the manufacturer/distributor shall be used.
- Cushion inside the seat should not be thicker than 25mm.
- This car is suitable for children under 0-36 months old.
- Max. Loading weight: seat 15kgs ; bottom basket 3kgs.
- Plastic bag maybe dangerous, keep away from the reach of children to avoid suffocation hazards.
- This baby stroller is suitable for one child.
- Do not use on stairs or uneven surfaces etc.
- Please read this user's manual carefully before using and keep it for future reference.

MAINTENANCE

- Please check the baby stroller periodical to avoid any danger by accident.
- Please use warm water at 10 to 40 degree and neutral detergent to wash the cloths.
- Please check whether all rivets and plastic parts are in good condition.
- Keep the baby stroller away from sunlight and wind and rain.
- When you disassemble the baby stroller, please follow up the user's manual.
- Only replacement parts supplied or recommended by the manufacturer/distributor shall be used.

1

INSTALLATION STEPS

1 How to open the frame

Open the folding lock, lift the handle upwards, and wait for the frame to fully unfold.



2 Installation and removal of front wheels

Installation: Insert the front wheel axially into the circular hole of the frame.
Disassembly: Press the silver buckle on the side and pull out the front wheel downwards.



3

INSTALLATION STEPS


5 Install the seat

Installation: Insert the buckle on both sides of the seat.
Disassembly: Press the buttons on both sides with both hands and lift the seat upwards.



6 Installation and removal of handrails

Installation: Insert the two side buckles into the slots.
Disassembly: Press the buckle and pull out the armrest.

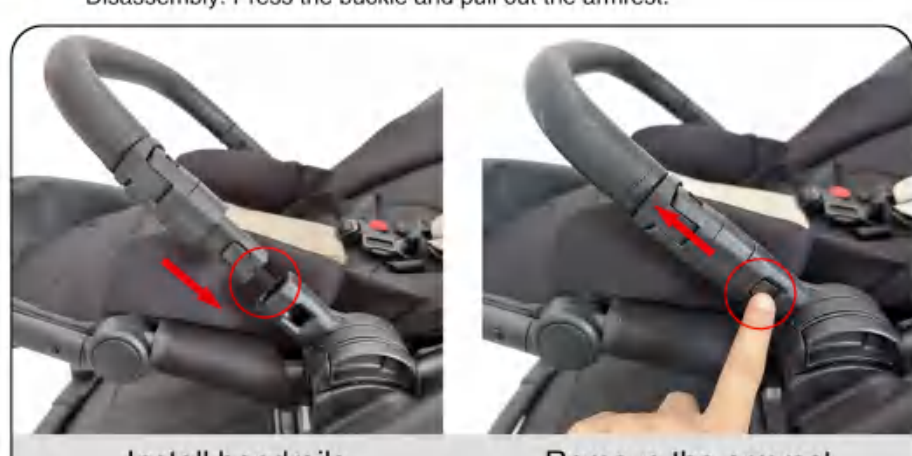

5

INSTRUCTIONS FOR USE

1 Seat angle adjustment and seat belt

Pull up the paddle to adjust the seat angle up and down.
The red button can release the seat belt, and the slider can adjust the length.



2 Braking and front wheel steering

Braking: Press the pedal to brake; Pull up and release the brake.
Front wheel direction: Press the button to make the front wheels straight ahead.




7

INSTRUCTIONS FOR USE

5 Seat armrest adjustment

Press the red buttons on both sides of the armrest and fold it down.

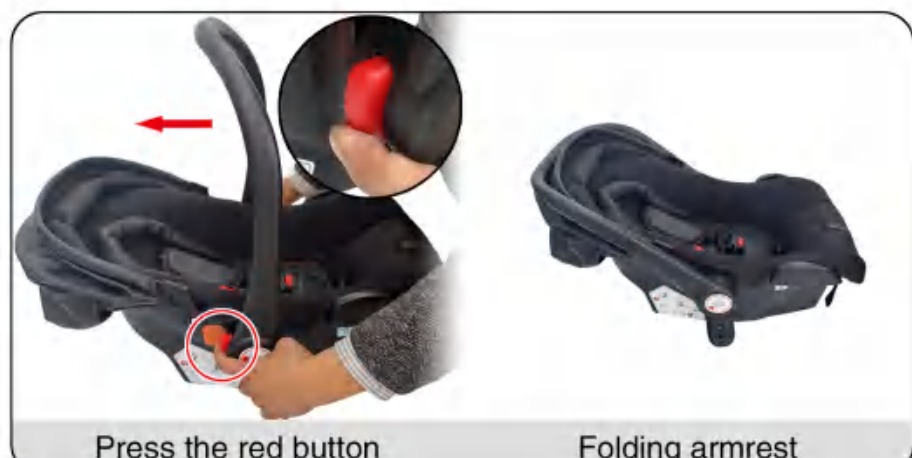

6 Folding cart

Fold the foot pedal first, then press the protective lock and lift the folding lock upwards with both hands.



9